

PHOTOMETRIC TEST REPORT

MONET 250 DALI


astro

LIGHT EFFICIENCY:
51 Lumen/Watt

LIGHT QUALITY:
CRI: 95.8


COLOR TEMPERATURE:
2760 K

OUTPUT: 425 lm
PEAK: 407 cd
POWER: 8.4 W
PF: 0.91

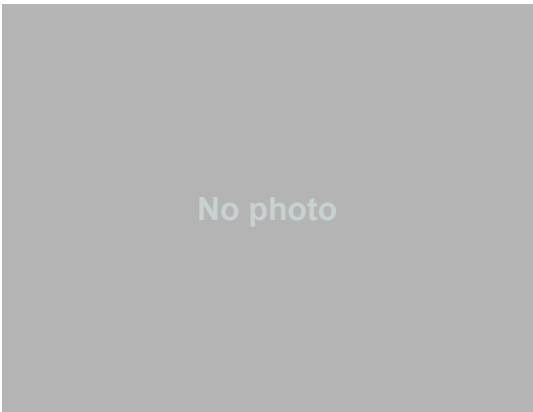


Tracking number: [n/a](#)


Product name:
Monet 250 DALI
Item number:
1517006
Date and time:
07/05/2026 15:53:04
Description:
IP20 LED Picture Light

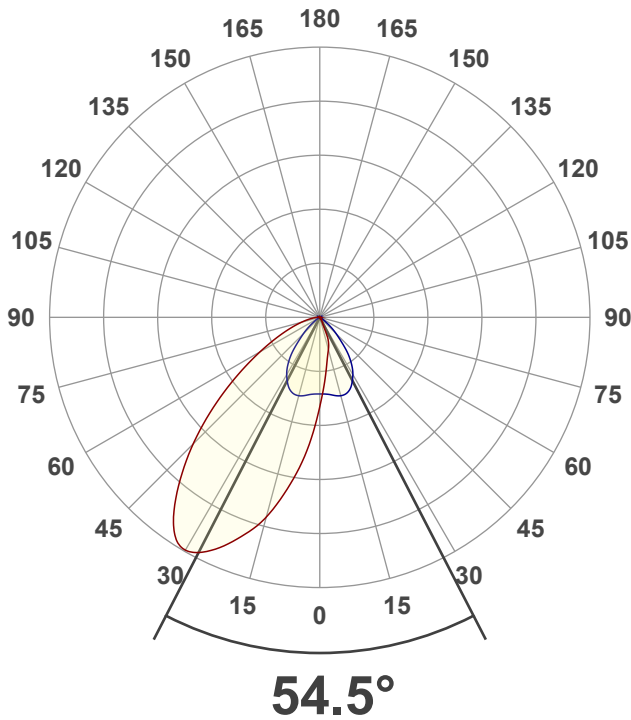



SPECTRA

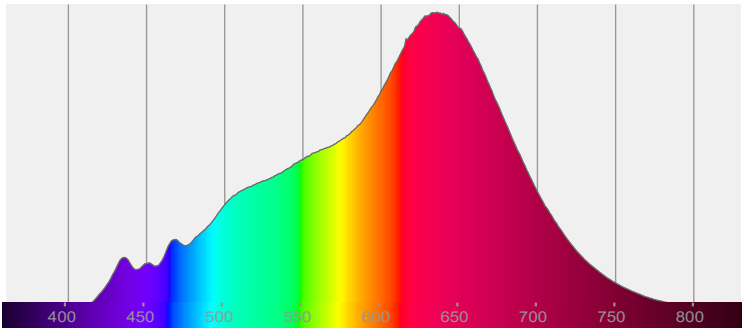


POWER

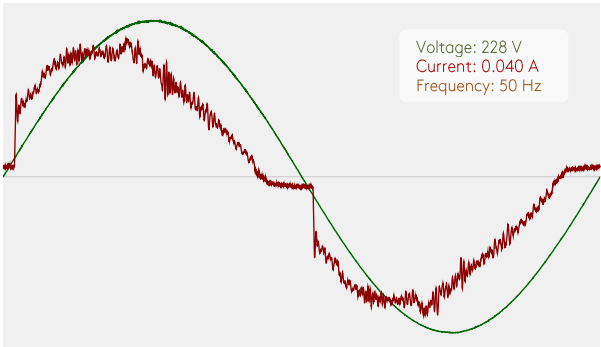


COLOR DETAILS

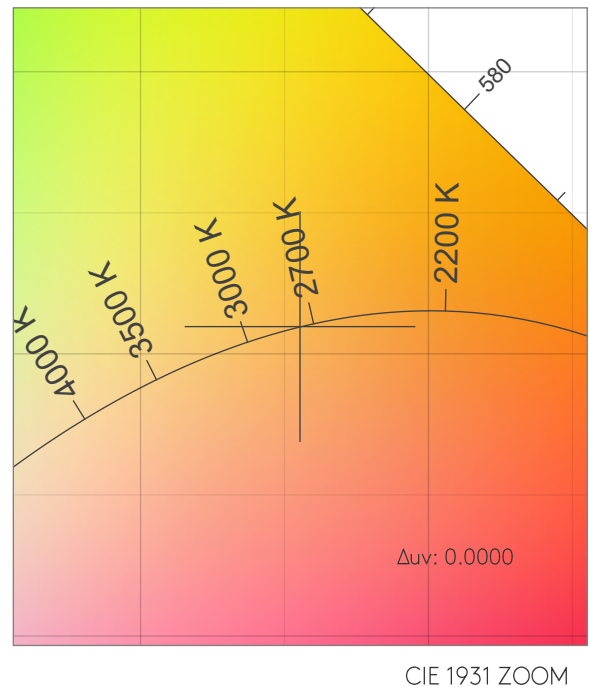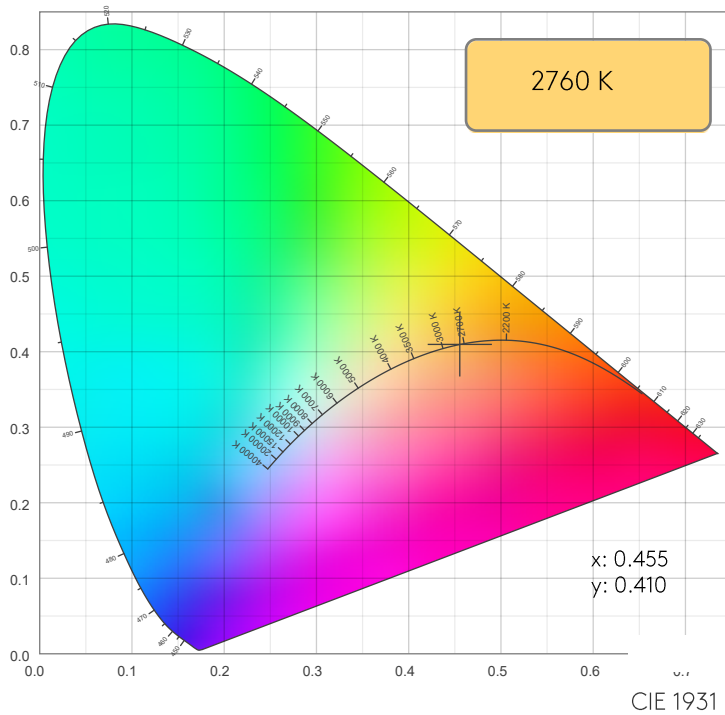

TM30: 95.8

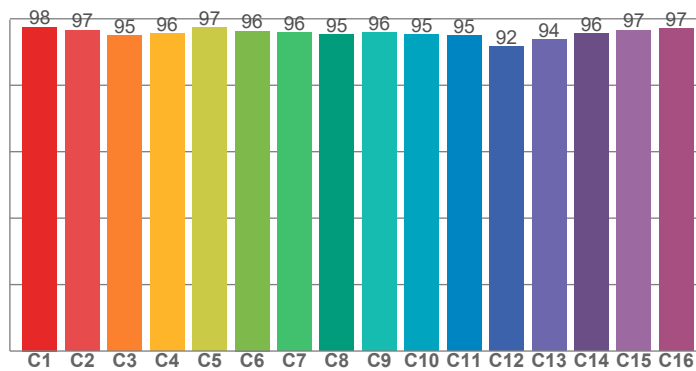

CRI: 95.8 (R1-R8)

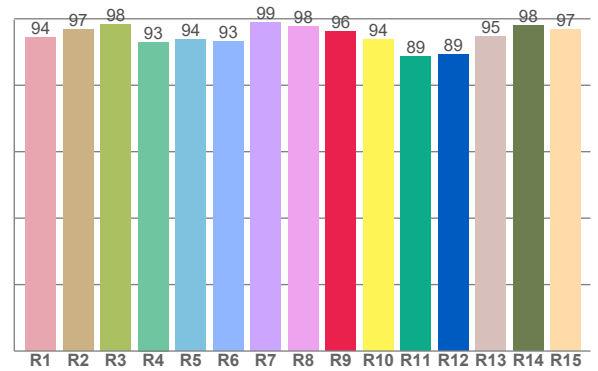

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
94.4	96.8	98.4	93.0	93.7	93.1	99.0	97.8	96.1	93.7	88.8	89.4	94.6	98.1	96.7


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
97.5	96.6	94.9	95.7	97.3	96.3	96.0	95.2	95.9	95.2	95.0	91.7	93.7	95.6	96.6	97.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
96.0	95.5	93.6	92.1	93.6	95.9	95.0	94.1	94.5	93.7	93.2	93.1	94.3	96.1	96.0

CQS: 94.2

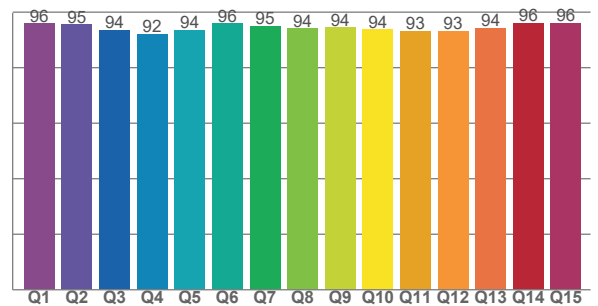







COLOR PARAMETERS

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
2760 K	95.8	96.1	95.8	100.5	94.2	0.455	0.410	0.260	0.351	0.0000


Rf 95.8
Fidelity index Rf

Rg 100.5
Gammut index Rg

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	98	1%	0%
2	97	1%	-1%
3	95	0%	-2%
4	96	-1%	-3%
5	97	-1%	0%
6	96	0%	2%
7	96	0%	3%
8	95	3%	1%
9	96	2%	0%
10	95	2%	-2%
11	95	2%	-3%
12	92	1%	-5%
13	94	-1%	-5%
14	96	-1%	-3%
15	97	-1%	0%
16	97	0%	-1%

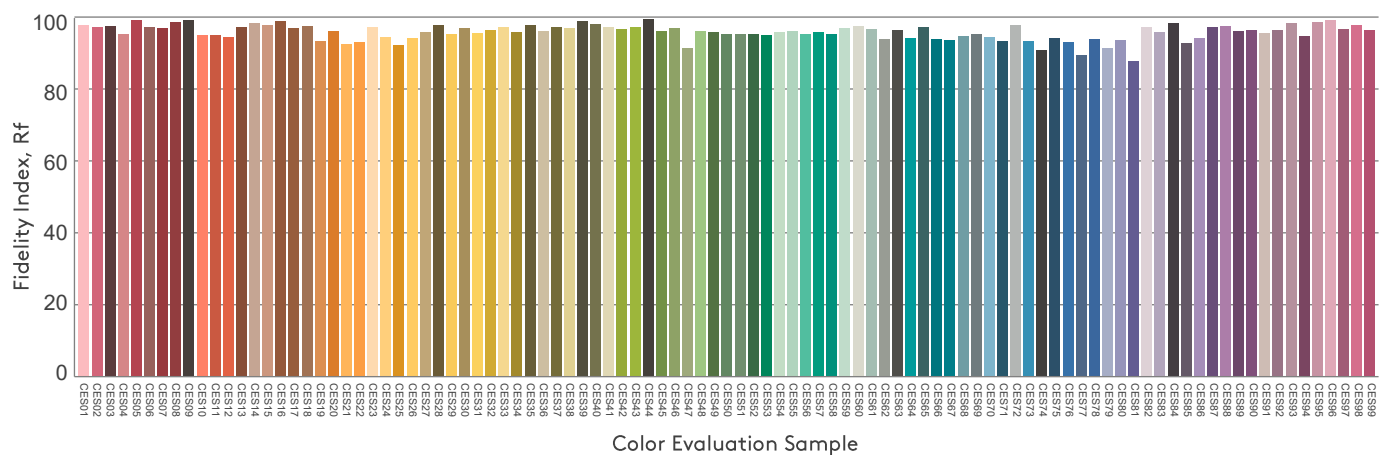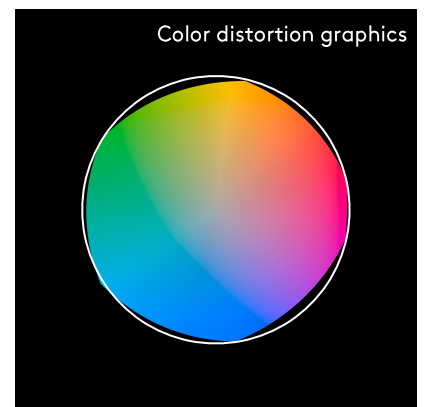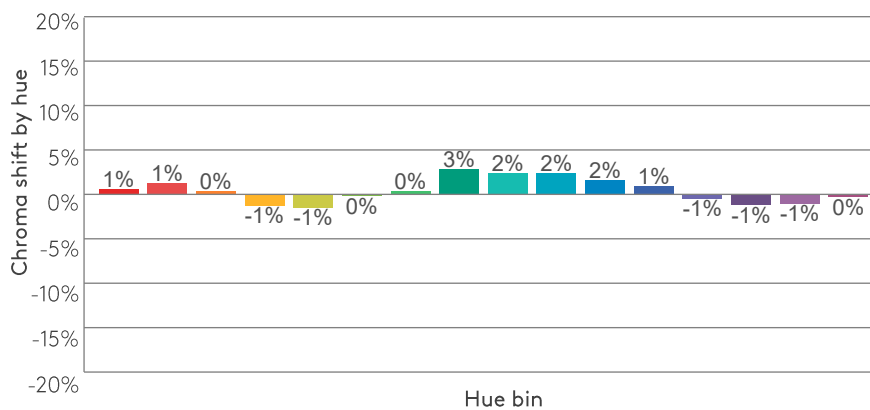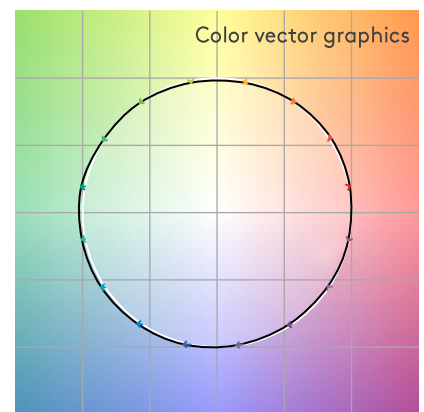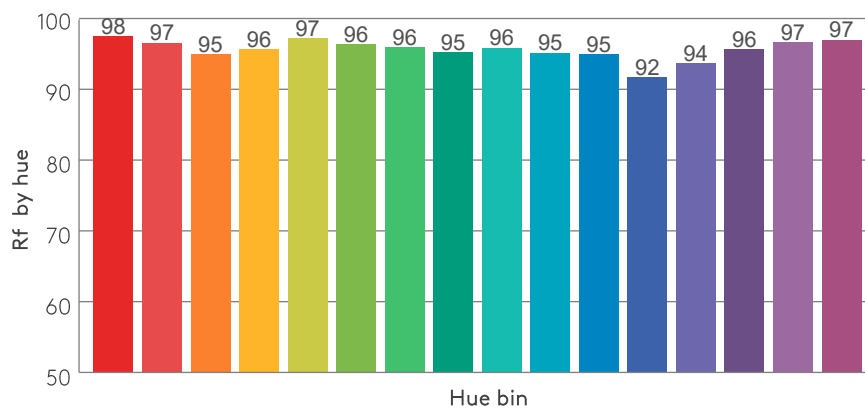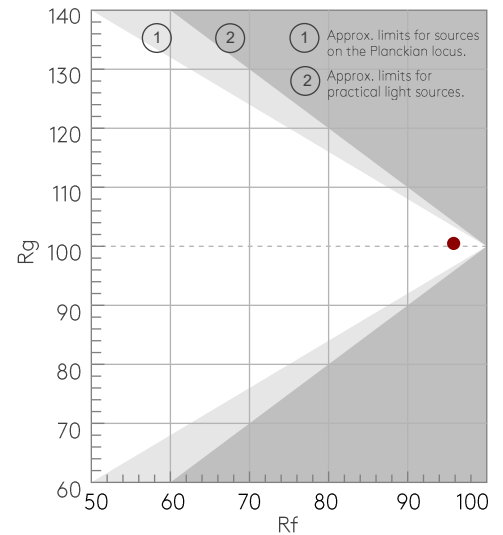

BEAM DETAILS

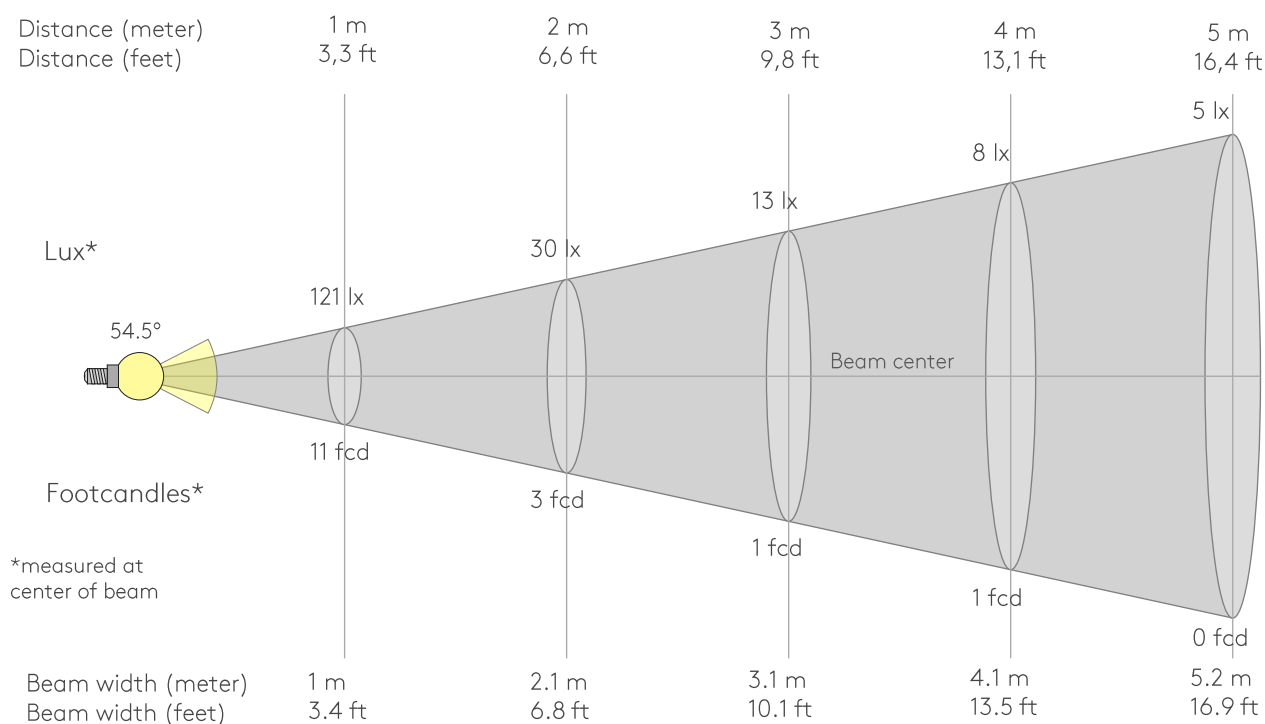

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
121lx	30lx	13lx	8lx	5lx	3lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx
11.2fcd	2.8fcd	1.2fcd	0.7fcd	0.4fcd	0.3fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
121	115	99	85	73	64	57	52	48	43	37	26	13	10	8	5	4	3	2	1
100%	95%	82%	71%	61%	53%	48%	43%	40%	36%	31%	22%	11%	8%	6%	4%	3%	2%	2%	1%

Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
121	115	115	116	117	119	120	121	122	121	120	118	114	110	105	99	93	85	77	68
100%	95%	95%	96%	97%	98%	99%	100%	101%	101%	100%	98%	95%	91%	87%	82%	77%	71%	64%	56%

Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
121	157	181	206	230	253	276	299	319	336	351	366	379	390	399	402	399	389	373	352
100%	130%	150%	171%	191%	210%	229%	248%	265%	278%	291%	303%	314%	323%	331%	333%	331%	323%	309%	292%

Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
121	115	115	116	117	119	120	121	122	121	120	118	114	110	105	99	93	85	77	68
100%	95%	95%	96%	97%	98%	99%	100%	101%	101%	100%	98%	95%	91%	87%	82%	77%	71%	64%	56%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
54,5°	97,5°	115,5°	89.0%	64.5%


ISO CANDELA DIAGRAM

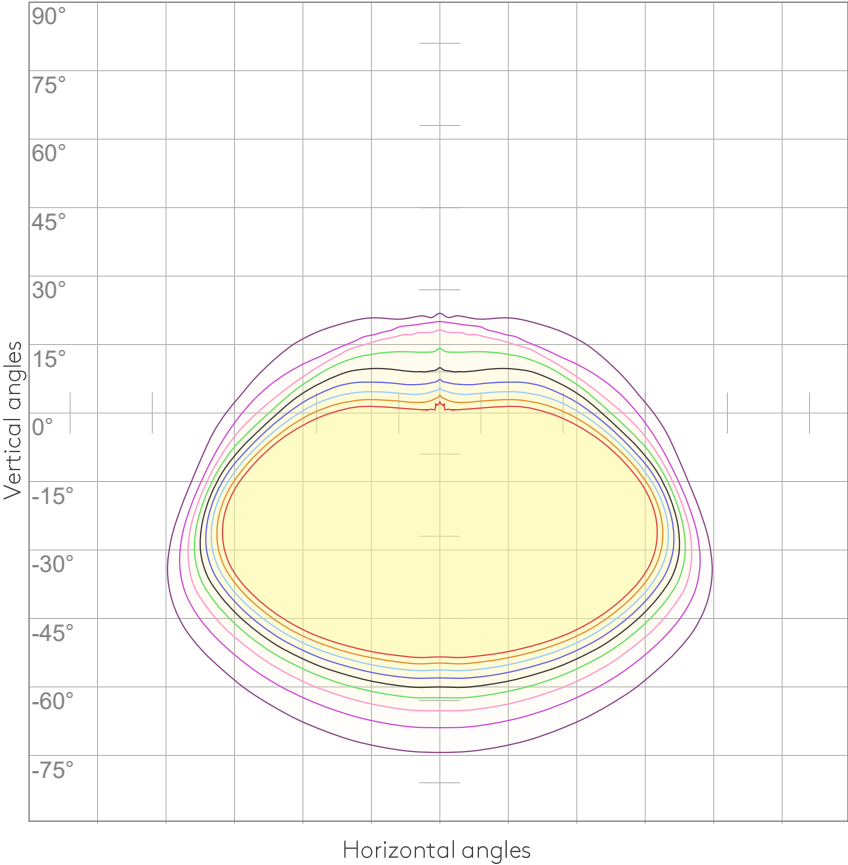

10%	12 cd
20%	24 cd
30%	36 cd
40%	48 cd
50%	60 cd
60%	72 cd
70%	84 cd
80%	97 cd
90%	109 cd

Conditions:
Number of c-planes: 72
Candela at center: 121 cd

ISO LUX DIAGRAM

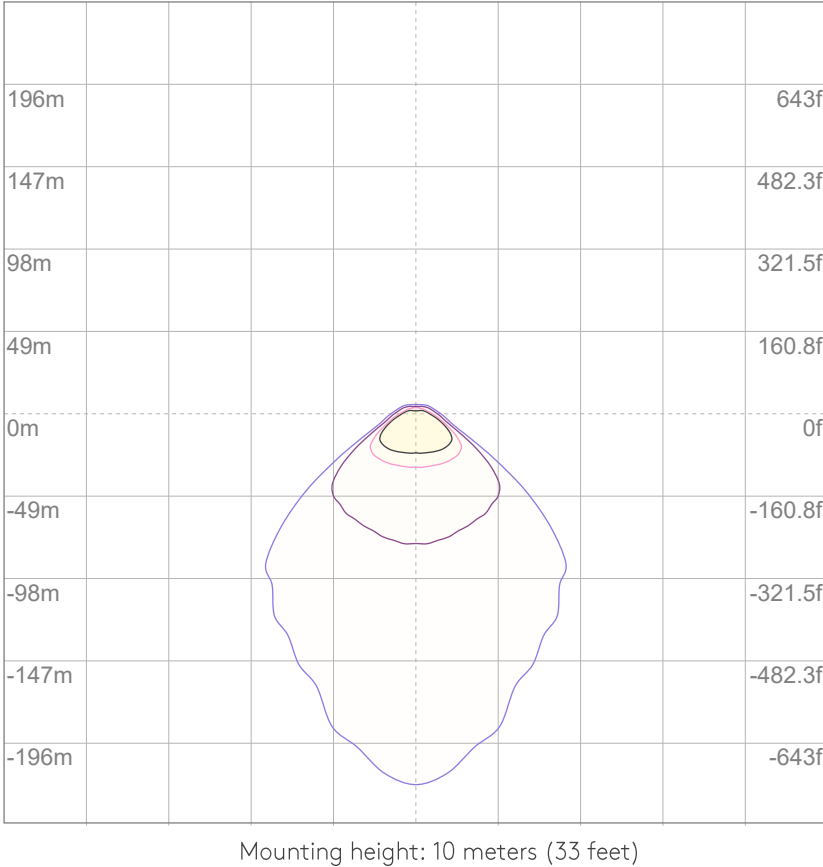

3%	36.2m lx
5%	60.4m lx
10%	0.121 lx
30%	0.362 lx
50%	0.604 lx

Conditions:
Number of c-planes: 72
Lux at center: 1.21 lx

Lux distribution on a surface
when lamp is mounted at 10
meters from the surface.

GLARE EVALUATION ACCORDING TO UGR


UGR data could not be calculated due to missing/wrong symmetry. Go to Edit -> Photometric -> Corrections and select Correct asymmetry (UGR not defined for asymmetrical distributions)..

COEFFICIENTS OF UTILIZATION

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	110	106	103	99	108	104	101	98	100	97	95	96	94	92	92	91	89	87
2	102	94	88	83	99	92	87	82	89	84	80	86	82	78	83	80	77	75
3	93	84	76	71	91	82	75	70	79	73	69	77	72	68	74	70	66	64
4	86	75	67	61	84	74	66	60	71	65	59	69	63	59	67	62	58	56
5	79	67	59	53	77	66	58	52	64	57	52	62	56	51	60	55	51	49
6	73	61	52	46	71	60	52	46	58	51	46	56	50	45	55	49	45	43
7	68	55	47	41	66	54	46	41	53	46	40	51	45	40	50	44	40	38
8	63	50	42	36	62	49	42	36	48	41	36	47	41	36	46	40	36	34
9	59	46	38	33	58	45	38	33	44	37	32	43	37	32	42	36	32	30
10	55	42	35	30	54	42	34	29	41	34	29	40	34	29	39	33	29	27

LAMPS (number of lamps)

LUMINAIRE BUDGETARY DIAGRAM

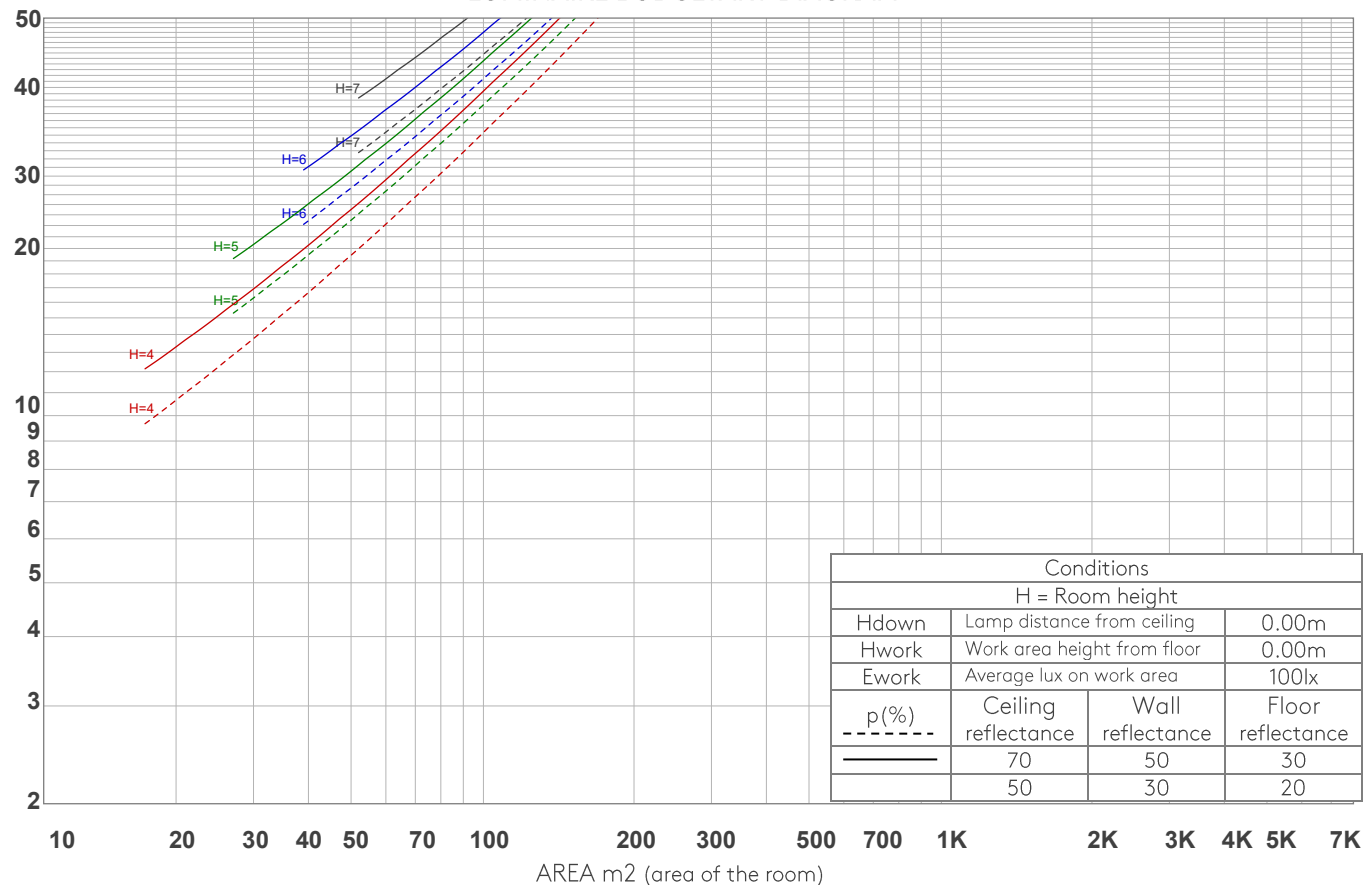

ZONAL LUMEN SUMMARY

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
12.3 lm	42.7 lm	75.5 lm	96.4 lm	89.1 lm	62.1 lm	31.4 lm	11.5 lm	2.90 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.386 lm	0.122 lm	0.069 lm	0.066 lm	0.063 lm	0.051 lm	0.034 lm	0.019 lm	0.006 lm

Flicker /TLA details

FLICKER

Flicker Meter Type Viso Systems LabFlicker
 Frequency of input power 50 Hz
 Flicker/TLA sample rate 20000 samples/s

Measurement time
 PstLM 180 sec
 All other indices 1,2 sec

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency 93.9 Hz
 Percent Flicker 0.42 %
 Flicker index 0

Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz 0.09 %
 JA8/10 90 Hz 0.15 %
 JA8/10 200 Hz 0.29 %
 JA8/10 400 Hz 0.35 %
 JA8/10 1000 Hz 0.4 %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value ($F < 80$ Hz) 0.06
 SVM value ($80 < F < 2000$ Hz) 0.01


Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp 0.05

Flicker frame (frame of one flicker period in time domain)

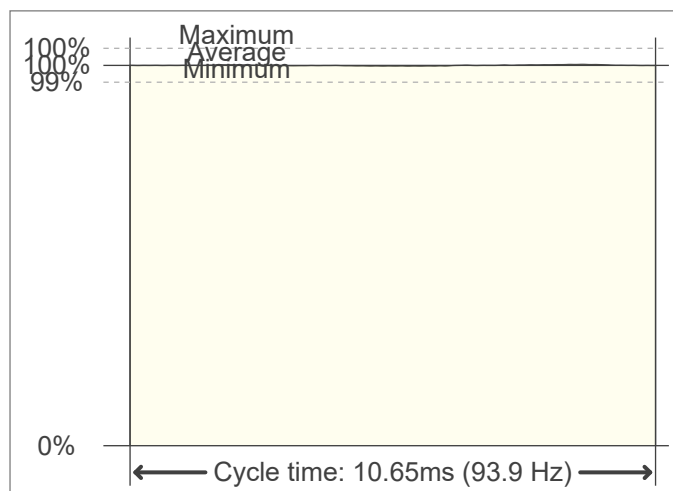

Flicker FFT (flicker curve in frequency domain)

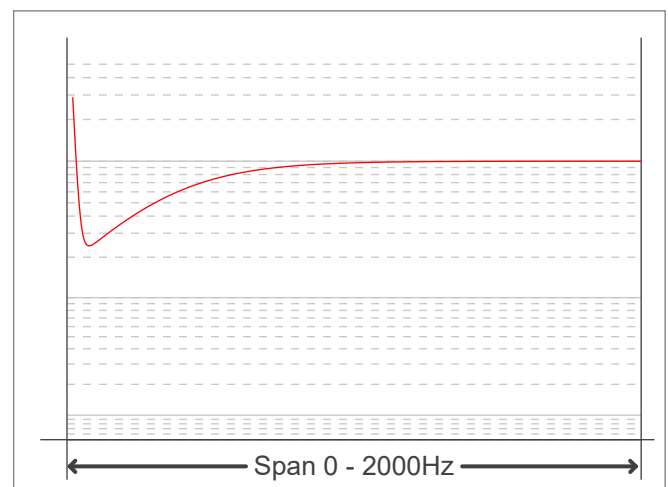

IEEE 1789 Frequency/modulation plot

